

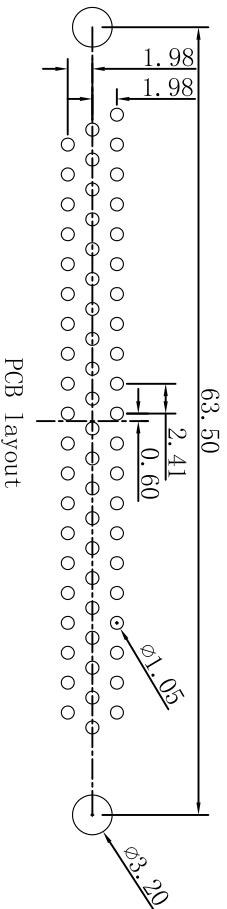
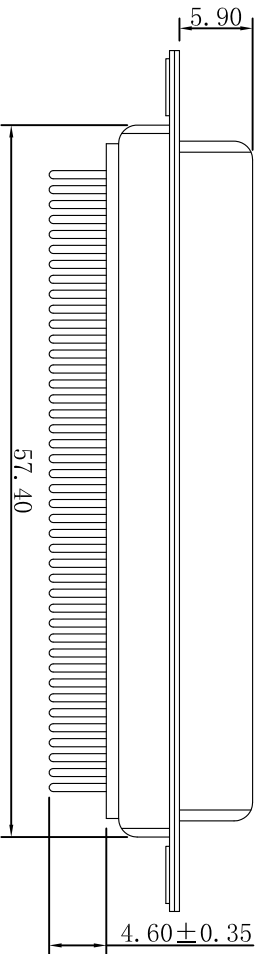



# GP Component

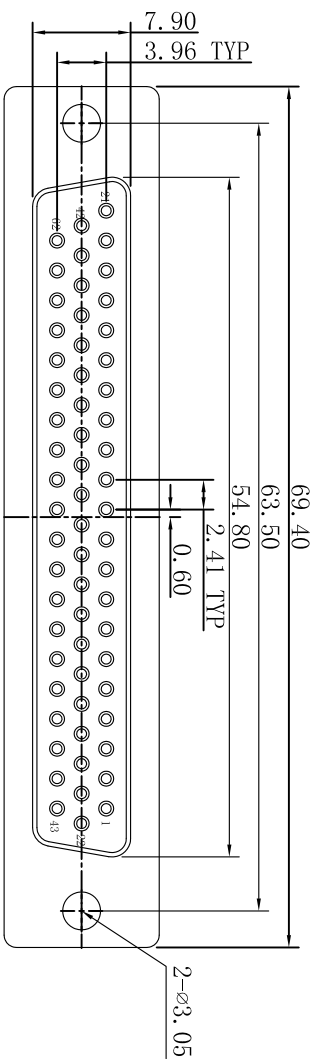

Specification Type

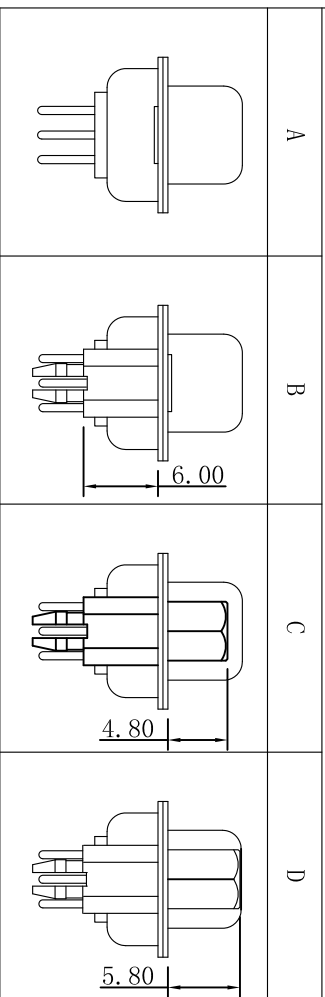

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.13	m t

### CHARACTERISTICS:

- RATED VOLTAGE: 250V AC CD
- RATED CURRENT: 3.0AMP
- CONTACT RESISTANCE: 30mΩ Max.
- INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- Electric Pressure: Keeping 60 second in AC 500V/1mA
- Operating temperature: -55°C~105°C
- INSERTION/EXTRACTION FORCE PER CONTACT: 13.2Kg Max  
1.1Kg Min.

01.HDP062 F X XXX XX A XXX

PIN Poles	62:62PIN	M/F Differentiates	M=Male F=Female	Hsg Color	1=Black 3=Blue 2=White 4=Green 5=Yellow 6=Purple	Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"
Water Code		Specification Type		Hsg Material	H1=PB1 HF H4=PA66 HF I0=PB1 I3=PA66				

	UNIT: mm [inch]			东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co.,Ltd
	TOLERANCE:			
X.X ±0.35	CHECKED: 2020.12.13			
X.XX ±0.25	APPROVED: 2020.12.13			
X.XXX ±0.15				
Angle ±3.0°				
SCALE:1:1 SIZE:A4				

