
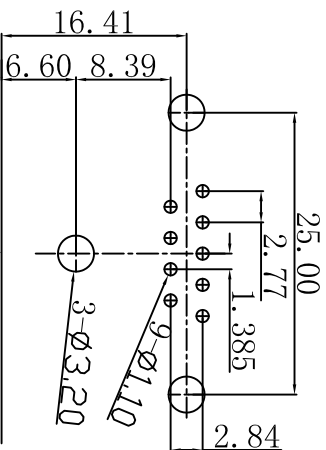
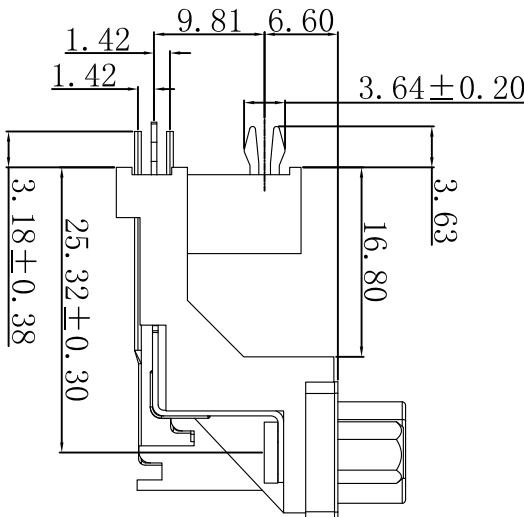
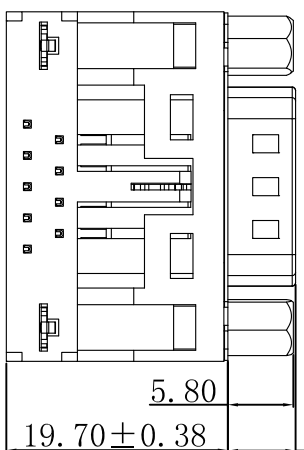
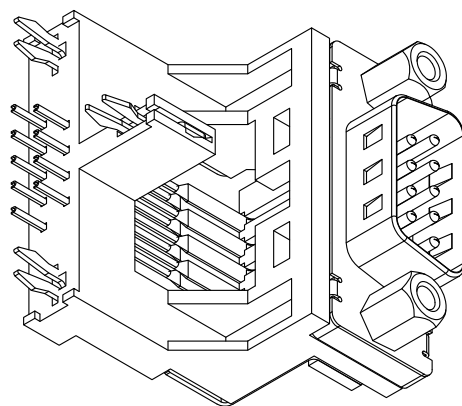


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2020.12.17	m t

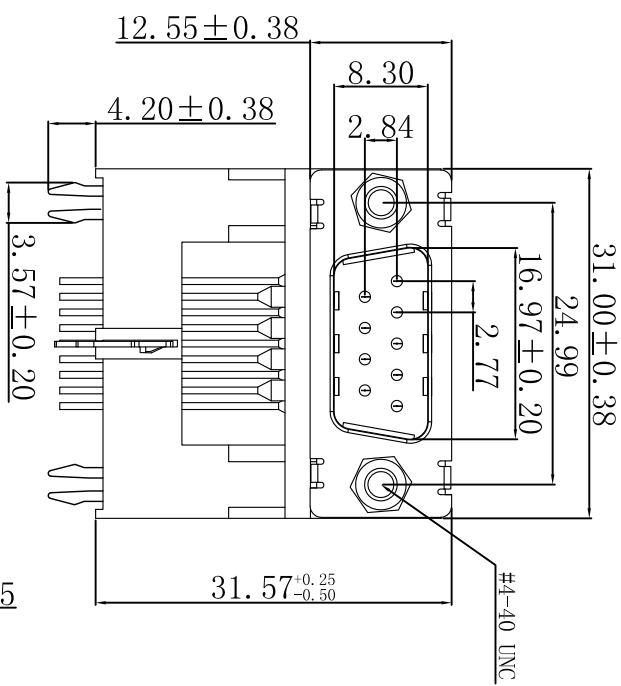

P.C.B. EDGE

CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C~105°C
7. INSERTION/EXTRACTON FORCE PER CONTACT: 3.0Kg Max 0.3Kg Min.

01.DRGJ09 M X XXX XX E XXX

PIN Poles	09:9PIN				
M/F Differentiates	M=Male F=Female				
Hsg Color	1=Black 3=Blue 2=White 4=Green 5=Yellow 6=Purple				
Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"				
	B00:Braight sn B01:Braight sn 1U" B03:Braight sn 3U" Bxx:Braight sn XXU"				
	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"				
Water Code					
Specification Type	H1=PB7 HF H4=PA66 HF 10=PB7 13=PA66				
Hsg Material	H2=PA6T HF H5=LCF 11=PA6T 14=PA46				
	H3=PA9T HF 12=PA9T				

 UNIT: mm [inch]	 TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	 东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd	DESIGN: 牟 2020.12.17	PART NAME: DR 9M高架系列
			CHECKED: 牟 2020.12.17	PART NO. 01.DRGJ09MXXXXXXXXXX
APPROVED: 牟 2020.12.17		DRAW NO.		SHEET NO. 01 OF 01
SCALE:1:1 SIZE:A4				