
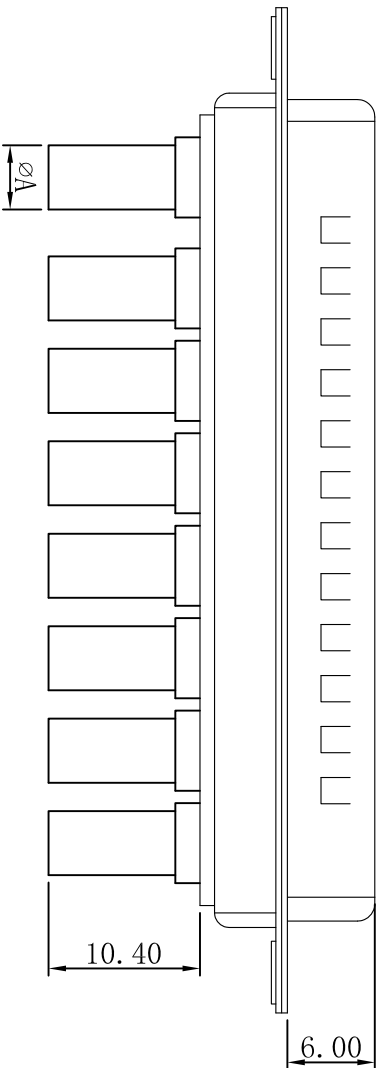
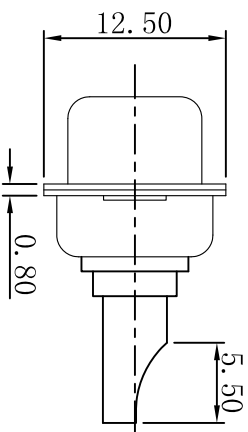


ROHS2.0

REV.	ECH NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.16	m t

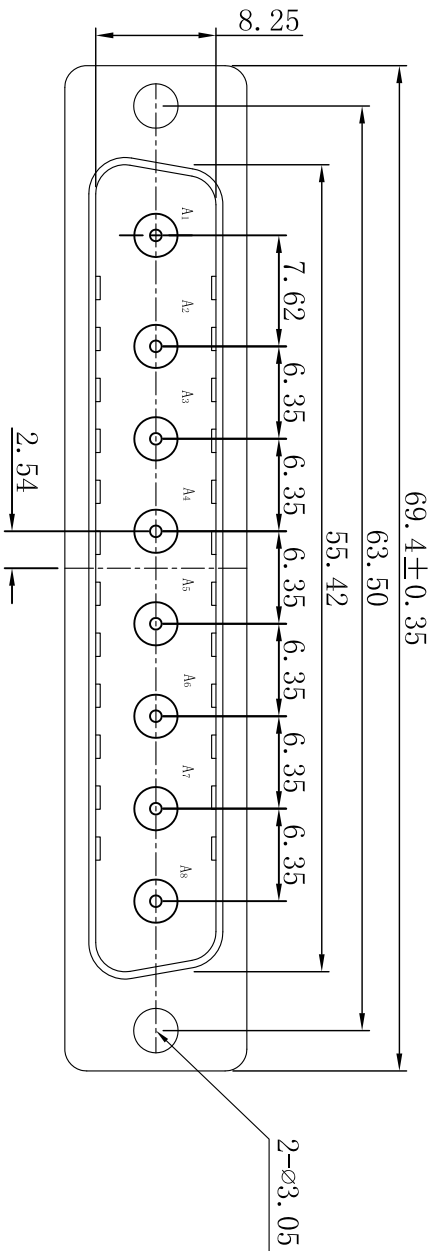

MATERIALS AND FINISH
 SHELL : STEEL MATERIAL, TIN FINISHED
 DIMPLES ON PLUG ONLY
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 HIGH POWER CONTACT MATERIAL: BRASS, 3U" GOLD PLATED

ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING : 30 AMPS
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55° C ~ +125° C

PO(X)	A	WIRE	CURRENT RATING (A)
1	2.5	14#~16#	10
2	3.6	10#~12#	20
3	4.4	8#~10#	30
4	5.5	6#~8#	40

			东港市跃展精密连接器有限公司 Dongguan Yuezhan Precision Connectors Co., Ltd Tel:+86-769-8316391/2 Fax:+86-769-8316391 Web:www.dgzyec.com
	TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	UNIT: mm (inch)	
DESIGN: 卓涛 2020.12.16	CHECKED: 卓涛 2020.12.16	PART NO.	SCALE:1:1 SIZE:A4
APPROVED: 卓涛 2020.12.16	DRAW NO.	SHEET NO.	DATE 2020.12.16
日期 2020.12.16	01 OF 01		